



C1NE

## Heat Sealer Machine



WHITE

Table Top Heat Sealing Machine.  
Digital control panel with a setting of temperature and time sealing.  
Multi format. Possibility to seal 3 different formats without changing the mold:

P1 – 137 x 95 mm  
P2 – 137 x 120 mm  
G – 190 x 137 mm


### COMPAC SYSTEM

- |                          |                                      |
|--------------------------|--------------------------------------|
| ■ Containers in PLA      | ■ Containers in PP                   |
| ■ Containers in APET     | ■ Containers in CPET                 |
| ■ Containers in CA + PLA | ■ Containers in ALUMINIUM (ALc/ALbn) |
| ■ Containers in CA + PET | ■ Containers in CA + PP              |

C1NE

FILM REEL B1

DATA SHEET

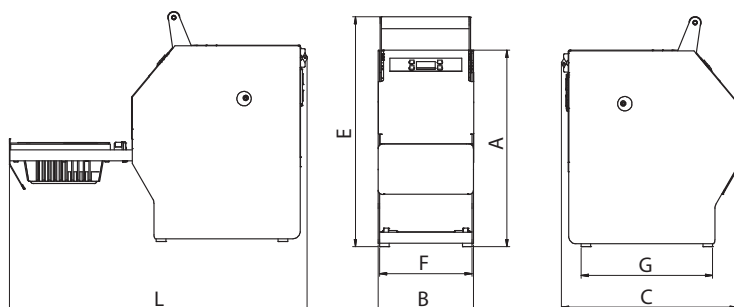

- Total weight: 22 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 414 B: 207 C: 366 E: 495 L: 620
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 195 G: 275
- Format and Film reel used:  
CONTAINERS Series P1 - P2 - G  
with B1 REELS  
width 150mm - MAX  $\varnothing$  155mm.

## MATERIALS

## CONTAINERS

| PP                 |    |                | CA+PP                |    |                | CA+PET               |    |                | ALc                  |    |                | PLA               |    |                |
|--------------------|----|----------------|----------------------|----|----------------|----------------------|----|----------------|----------------------|----|----------------|-------------------|----|----------------|
| From 0°C to +110°C |    |                | From -40°C to +200°C |    |                | From -40°C to +200°C |    |                | From -40°C to +200°C |    |                | From 0°C to +40°C |    |                |
| APR30T             | P1 | 136 x 95 x 30  | V45PCA               | P2 | 137 x 122 x 45 | V40P1CB              | P1 | 136 x 95 x 40  | VA45Pc               | P2 | 142 x 126 x 45 | GD30PT            | P1 | 137 x 95 x 30  |
| APR45T             | P1 | 136 x 95 x 45  | V45GCA               | G  | 192 x 140 x 45 | V65P1CB              | P1 | 136 x 95 x 65  | VA45Gc               | G  | 196 x 142 x 45 | GD45PT            | P1 | 137 x 95 x 45  |
| APR63T             | P1 | 136 x 95 x 63  | APET                 |    |                | V45PC                | P2 | 137 x 122 x 45 | ALbn                 |    |                | GD63PT            | P1 | 137 x 95 x 63  |
| APN45T             | P2 | 136 x 120 x 45 | From -40°C to +70°C  |    |                | V33GC                | G  | 192 x 140 x 33 | From -40°C to +200°C |    |                | GD45PNT           | P2 | 137 x 120 x 45 |
| APN65T             | P2 | 136 x 120 x 65 | GB30PT               | P1 | 137 x 95 x 30  | V45GC                | G  | 192 x 140 x 45 | V45Pabn              | P2 | 142 x 126 x 45 | GD65PNT           | P2 | 137 x 120 x 65 |
| APN82T             | P2 | 136 x 120 x 82 | GB45PT               | P1 | 137 x 95 x 45  | V75GC                | G  | 192 x 140 x 75 | V45Gabn              | G  | 196 x 142 x 45 | GD82PNT           | P2 | 137 x 120 x 82 |
| AG25T              | G  | 190 x 136 x 25 | GB63PT               | P1 | 137 x 95 x 63  | CPET                 |    |                | CA+PLA               |    |                | GD25GT            | G  | 190 x 137 x 25 |
| AG38T              | G  | 190 x 136 x 38 | GB45PNT              | P2 | 137 x 120 x 45 | From -40°C to +180°C |    |                | From -40°C to +200°C |    |                | GD38GT            | G  | 190 x 137 x 38 |
| AG50T              | G  | 190 x 136 x 50 | GB65PNT              | P2 | 137 x 120 x 65 | D45P                 | P2 | 136 x 120 x 45 | V40P1CD              | P1 | 136 x 95 x 40  | GD50GT            | G  | 190 x 137 x 50 |
| AG70T              | G  | 190 x 136 x 70 | GB82PNT              | P2 | 137 x 120 x 82 | D65P                 | P2 | 136 x 120 x 65 | V65P1CD              | P1 | 136 x 95 x 65  | GD70GT            | G  | 190 x 137 x 70 |
| AG85TP             | G  | 190 x 136 x 85 | GB25GT               | G  | 190 x 137 x 25 | D38G                 | G  | 190 x 136 x 38 | V45PCD               | P2 | 137 x 122 x 45 | GD85GT            | G  | 190 x 137 x 85 |
|                    |    |                | GB38GT               | G  | 190 x 137 x 38 | D50G                 | G  | 190 x 136 x 50 | V33GCD               | G  | 192 x 140 x 33 |                   |    |                |
|                    |    |                | GB50GT               | G  | 190 x 137 x 50 | DT50G                | G  | 190 x 136 x 50 | V45GCD               | G  | 192 x 140 x 45 |                   |    |                |
|                    |    |                | GB70GT               | G  | 190 x 137 x 70 | D70G                 | G  | 190 x 136 x 70 | V75GCD               | G  | 192 x 140 x 75 |                   |    |                |
|                    |    |                | GB85GT               | G  | 190 x 137 x 85 |                      |    |                |                      |    |                |                   |    |                |

## MATERIALS

## HEAT SEALING FILMS



## TABLE TOP SYSTEM

|           |                 |                                                  | for Containers |       |        |      |      |     |      |
|-----------|-----------------|--------------------------------------------------|----------------|-------|--------|------|------|-----|------|
| Reference | Characteristics |                                                  | PP             | CA+PP | CA+PET | APET | CPET | ALc | ALbn |
| B1        | T               | monolayer / strong seal                          | X              | X     |        |      |      |     |      |
| B1        | TNAF            | monolayer / strong seal / anti-fog               | X              | X     |        |      |      |     |      |
| B1        | TMF             | monolayer / strong seal / microperforated        | X              | X     |        |      |      |     |      |
| B1        | TSB             | monolayer / strong seal                          |                |       | X      | X    | X    |     |      |
| B1        | TSBAF           | monolayer / strong seal / anti-fog               |                |       | X      | X    | X    |     |      |
| B1        | TSBMF           | monolayer / strong seal / microperforated        |                |       | X      | X    | X    |     |      |
| B1        | TSPBAF          | monolayer / strong seal + peelability / anti-fog |                |       | X      | X    | X    |     |      |
| B1        | TPBHAF          | monolayer / peelable / anti-fog                  |                |       | X      | X    | X    |     |      |
| B1        | TPBAF           | monolayer / peelable / anti-fog                  |                |       | X      | X    | X    |     |      |
| B1        | TA              | multilayer / strong seal                         | X              | X     |        |      |      |     | X    |
| B1        | TAAF            | multilayer / strong seal / anti-fog              | X              | X     |        |      |      |     | X    |
| B1        | TPAAF           | multilayer / peelable / anti-fog                 | X              | X     |        |      |      |     | X    |
| B1        | TOPAU           | multilayer / peelable / universal                | X              | X     | X      | X    | X    | X   | X    |
| B1        | TRBAF           | multilayer / resealable / anti-fog               |                |       |        | X    |      |     |      |

## MATERIALS

## HEAT SEALING FILMS



## TABLE TOP SYSTEM

|           |                 |                                                                  | for Containers |      |      |     |        |     |
|-----------|-----------------|------------------------------------------------------------------|----------------|------|------|-----|--------|-----|
| Reference | Characteristics |                                                                  | CA+PET         | APET | CPET | PLA | CA+PLA | ALc |
| B1        | TBFN            | monolayer / strong seal / compostable                            | X              | X    | X    | X   | X      |     |
| B1        | TADFNL          | multilayer / strong seal + peelability* / compostable            | X              | X    | X    | X   | X      | X   |
| B1        | TAADFNL         | multilayer / strong seal + peelability* / anti-fog / compostable | X              | X    | X    | X   | X      | X   |

\* according to the sealing temperature and/or the container material used, the film can be sealable and/or peelable



Biodegradable and compostable films,  
in compliance with norm EN13432.

## MATERIALS

## TRASPARENT LIDS IN APET



|                 |        |               | for Containers |      |      |     |
|-----------------|--------|---------------|----------------|------|------|-----|
| Item            | Series | (mm)<br>L x B | APET           | CPET | ALbn | ALc |
| CTU.B.P (P0515) | P2     | 149 x 132     | X              | X    | X    | X   |
| CTU.B.G (G0875) | G      | 203 x 149     | X              | X    | X    | X   |

No responsibility is implied or may be linked to this catalog.

All technical data does not have scientific value and are reported only for the purpose technical / application of the product.

Technological suitability: the product must always be verified by the user as regards the technological suitability referring to the production process, the packaging environment and the food to be packaged.

Compac s.r.l.  
Via Spallanzani 8/a  
42024 Castelnovo di Sotto - RE - Italy  
Tel. +39 0522.688.509 / +39 0522.683.873  
www.compac.it - info@compac.it

SCAN THE QR CODE  
AND FIND OUT MORE



COMPANY WITH  
FOOD SAFETY SYSTEM  
CERTIFIED BY DNV  
ISO 22000

COMPANY WITH  
MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
ISO 9001 • ISO 14001  
ISO 45001

