



C2MCS

Heat Sealer Machine



Table Top Heat Sealing Machine.
Digital control panel with a setting of temperature and time sealing.
Multi format. Possibility to seal 5 different formats without changing the mold:

- | | |
|-------------------|------------------|
| P1 – 137 x 95 mm | L – 230 x 190 mm |
| P2 – 137 x 120 mm | M – 260 x 190 mm |
| G – 190 x 137 mm | |


COMPAC SYSTEM

- | | |
|----------------------------------|--------------------------------------|
| ■ Containers in PLA | ■ Containers in CA + PET |
| ■ Containers in APET | ■ Containers in PP |
| ■ Containers in CA + PLA | ■ Containers in CPET |
| ■ Containers in CELLULOSE (PULP) | ■ Containers in ALUMINIUM (ALc/ALbn) |

C2MCS

FILM REEL B2 + FILM SHEET

DATA SHEET

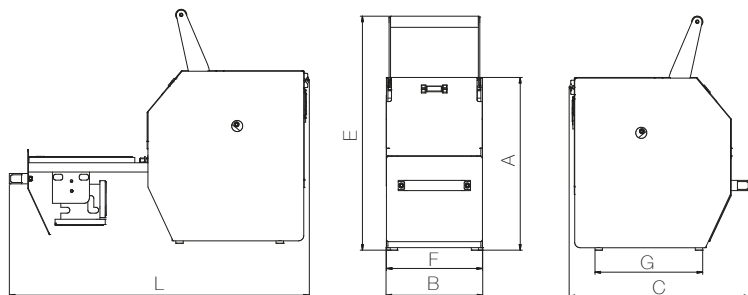

- Total weight: 42 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V ± 10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:
A: 480 B: 270 C: 489 E : 620 L: 813
- MINIMUM DIMENSIONS OF WORKTABLE mm:
F: 240 G: 295
- Format and Film reel used:
CONTAINERS Series P1 - P2
with FILM SHEETS
CONTAINERS Series G - L - M
with B2 REELS
width 210mm - MAX Ø 155mm.

MATERIALS

CONTAINERS

PP			APET			CA+PET			ALc			PLA		
APR30T	P1	136 x 95 x 30	GB30PT	P1	137 x 95 x 30	V45PC	P2	137 x 122 x 45	VA45Pc	P2	142 x 126 x 45	GD30PT	P1	137 x 95 x 30
APR45T	P1	136 x 95 x 45	GB45PT	P1	137 x 95 x 45	V33GC	G	192 x 140 x 33	VA45Gc	G	196 x 142 x 45	GD45PT	P1	137 x 95 x 45
APR63T	P1	136 x 95 x 63	GB63PT	P1	137 x 95 x 63	V45GC	G	192 x 140 x 45	VA45Lc	L	233 x 196 x 45	GD63PT	P1	137 x 95 x 63
APN45T	P2	136 x 120 x 45	GB45PNT	P2	137 x 120 x 45	V75GC	G	192 x 140 x 75	VA45Mc	M	266 x 196 x 45	GD45PNT	P2	137 x 120 x 45
APN65T	P2	136 x 120 x 65	GB65PNT	P2	137 x 120 x 65	V25LBC	L	232 x 192 x 25	ALbn			GD65PNT	P2	137 x 120 x 65
APN82T	P2	136 x 120 x 82	GB82PNT	P2	137 x 120 x 82	V45LC	L	232 x 192 x 45	V45Pabn	P2	142 x 126 x 45	GD82PNT	P2	137 x 120 x 82
AG25T	G	190 x 136 x 25	GB25GT	G	190 x 137 x 25	V20MBC	M	262 x 192 x 20	V45Gabn	G	196 x 142 x 45	GD25GT	G	190 x 137 x 25
AG38T	G	190 x 136 x 38	GB38GT	G	190 x 137 x 38	V45MC	M	262 x 192 x 45	V45Labn	L	233 x 196 x 45	GD38GT	G	190 x 137 x 38
AG50T	G	190 x 136 x 50	GB50GT	G	190 x 137 x 50	CPET			V45Mabn	M	266 x 262 x 45	GD50GT	G	190 x 137 x 50
AG70T	G	190 x 136 x 70	GB70GT	G	190 x 137 x 70	D45P	P2	136 x 120 x 45	CA+PLA			GD70GT	G	190 x 137 x 70
AG85TP	G	190 x 136 x 85	GB85GT	G	190 x 137 x 85	D65P	P2	136 x 120 x 65	V45PCD	P2	137 x 122 x 45	GD85GT	G	190 x 137 x 85
AL25T	L	230 x 190 x 25	GB15LT	L	230 x 190 x 15	D38G	G	190 x 136 x 38	V33GCD	G	192 x 140 x 33	GD15LT	L	230 x 190 x 15
AL35T	L	230 x 190 x 35	GRB20LTi	L	230 x 190 x 20	D50G	G	190 x 136 x 50	V45GCD	G	192 x 140 x 45	GD25LT	L	230 x 190 x 25
AL50T	L	230 x 190 x 50	GB25LT	L	230 x 190 x 25	DT50G	G	190 x 136 x 50	V75GCD	G	192 x 140 x 75	GD35LT	L	230 x 190 x 35
AL65T	L	230 x 190 x 65	GB35LT	L	230 x 190 x 35	D70G	G	190 x 136 x 70	V25LCD	L	232 x 192 x 25	GD50LT	L	230 x 190 x 50
AM25T	M	260 x 190 x 25	GB50LT	L	230 x 190 x 50	D38L	L	230 x 190 x 38	V45LCD	L	232 x 192 x 45	GD65LT	L	230 x 190 x 65
AM35T	M	260 x 190 x 35	GB65LT	L	230 x 190 x 65	D50L	L	230 x 190 x 50	V20MCD	M	262 x 192 x 20	GD15MT	M	260 x 190 x 15
AM50T	M	260 x 190 x 50	GB15MT	M	260 x 190 x 15	DB50L	L	230 x 190 x 50	V45MCD	M	262 x 192 x 45	GD25MT	M	260 x 190 x 25
AM65T	M	260 x 190 x 65	GRB20MTi	M	260 x 190 x 20	D38M	M	260 x 190 x 38	PULP			GD35MT	M	260 x 190 x 35
			GB25MT	M	260 x 190 x 25	D50M	M	260 x 190 x 50	VP45PU	P2	140 x 124 x 45	GD50MT	M	260 x 190 x 50
			GB35MT	M	260 x 190 x 35				VP45GU	G	194 x 140 x 45	GD65MT	M	260 x 190 x 65
			GB50MT	M	260 x 190 x 50				VP45LU	L	232 x 194 x 45			
			GB65MT	M	260 x 190 x 65				VP45MU	M	263 x 194 x 45			

MATERIALS

HEAT SEALING FILMS



TABLE TOP SYSTEM				for Containers					
Reference	Characteristics	PP	CA+PET	APET	CPET	ALc	ALbn	PULP	
B2 T	monolayer / strong seal	X							
B2 TNAF	monolayer / strong seal / anti-fog	X							
B2 TMF	monolayer / strong seal / microperforated	X							
B2 TSB	monolayer / strong seal		X	X	X				
B2 TSBFAF	monolayer / strong seal / anti-fog		X	X	X				
B2 TSBMF	monolayer / strong seal / microperforated		X	X	X				
B2 TSPBAF	monolayer / strong seal + peelability / anti-fog		X	X	X				
B2 TPBHAF	monolayer / peelable / anti-fog		X	X	X				
B2 TA	multilayer / strong seal	X					X	X	
B2 TAAF	multilayer / strong seal / anti-fog	X					X	X	
B2 TPU	multilayer / peelable / universal	X	X	X	X	X	X	X	
B2 TPUMAF	multilayer / peelable / anti-fog / universal	X	X	X	X	X	X	X	

MATERIALS

HEAT SEALING FILMS



TABLE TOP SYSTEM				for Containers			
Reference	Characteristics	PLA	CA+PLA	PULP	ALc		
B2 TBFN	monolayer / strong seal / compostable	X	X				
B2 TADFN	multilayer / peelable / compostable	X	X	X	X		



Biodegradable and compostable films, in compliance with norm EN13432.

MATERIALS

TRASPARENT LIDS IN APET



			for Containers				
Item	Series	(mm) L x B	PP	APET	CPET	ALbn	ALc
CTU.B.P (P0515)	P2	149 x 132	X	X	X	X	X
CTU.B.G (G0875)	G	203 x 149	X	X	X	X	X
CTU.B.L (L1570)	L	240 x 203	X	X	X	X	X
CTU.B.M (M1820)	M	273 x 203	X	X	X	X	X

No responsibility is implied or may be linked to this catalog. All technical data does not have scientific value and are reported only for the purpose technical / application of the product. Technological suitability: the product must always be verified by the user as regards the technological suitability referring to the production process, the packaging environment and the food to be packaged.

Compac s.r.l.
Via Spallanzani 8/a
42024 Castelnovo di Sotto - RE - Italy
Tel. +39 0522.688.509
Fax +39 0522.688.552
www.compac.it - info@compac.it

COMPANY WITH SAFETY MANAGEMENT SYSTEM CERTIFIED BY DNV GL = ISO 45001 =

COMPANY WITH ENVIRONMENTAL SYSTEM CERTIFIED BY DNV GL = ISO 14001 =

COMPANY WITH FOOD SAFETY SYSTEM CERTIFIED BY DNV GL = ISO 22000 =

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV GL = ISO 9001 =

